

ATELIER

BY DUCHATEAU




ATELIER EVENTIDE

PRODUCT ID	ATL-EVET7-31	CONSTRUCTION	ENGINEERED	INSTALLATION	GLUE-DOWN, NAIL/STAPLE WITH GLUE-ASSIST, OR FLOATING ²
TOP LAYER	4 MM ¹	GRADE	CHARACTER	RADIANT HEAT	APPROVED (SEE INSTALLATION INSTRUCTIONS)
AVAILABLE WIDTH	7-1/2" (190 MM) , 9-1/2" (240 MM)	FINISH	UV OIL	WARRANTY	LIMITED LIFETIME STRUCTURAL INTEGRITY 25-YEAR RESIDENTIAL SURFACE FINISH 3-YEAR COMMERCIAL SURFACE FINISH
LENGTH	RANDOM LENGTH UP TO 96-1/2" (2450 MM)	SURFACE TREATMENT	WIREBRUSHED	TRIM	STAIRNOSE, REDUCER, THRESHOLD, T-MOLD, AND SQUARENOSE
COVERAGE PER BOX	7-1/2": 20.04 SQ. FT., 9-1/2": 25.32 SQ. FT.	THICKNESS	5/8 INCH (16 MM)		
SPECIES	EUROPEAN OAK	SHEEN	MATTE		

RELATIVE HUMIDITY (in %)



VARIATION GUIDE (PLEASE REFER TO DUCHATEAU.COM FOR ADDITIONAL AVAILABLE STYLES)

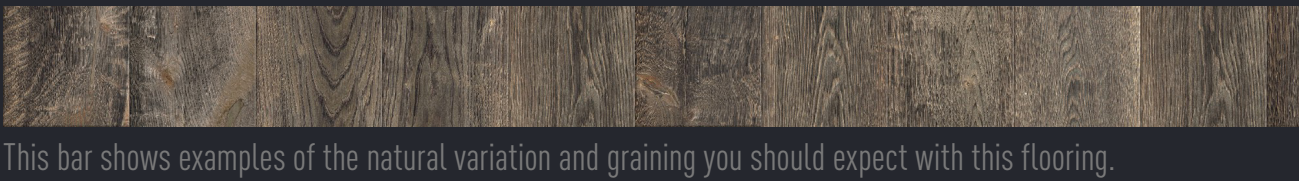

This bar shows examples of the natural variation and graining you should expect with this flooring.

DUCHATEAU.COM | 1.888.DUCHATEAU

Product Sample Disclaimer: Created to be a truly individual piece of nature's artistry, each and every DUCHATEAU product carries distinct variations in size, shape, thickness, finish, texture, grain and overall character. This is how we develop the unique diversity and natural elegance of our flooring. Individual samples of these floors are merely for reference and not meant to serve as exact representations; it is virtually impossible to capture – in a single image or physical sample – the entire range of color variation and character that will be present in the flooring you will receive. To better understand the unique look of DUCHATEAU finished floor in your space, we recommend consulting your sales representative for more details.

Installation and Performance Disclaimer: Environmental conditions, such as exposure to light, and fluctuations in temperature and humidity, can affect product performance from initial installation throughout its life. Refer to our website for installation guidelines or see your local sales representative for more information on proper steps and specific environmental conditions to successfully install, care for and ensure the lifelong performance of your floor.

Note: All measurements are nominal.
¹ Nominal top layer thickness measured prior to finishing processes.
Finishing processes such as wire-brushing will affect the overall thickness.
² Flooring with plank widths above 7-1/2" cannot be floated.

171 TSCA Title VI Compliant
©DUCHATEAU | All rights reserved.

SCAN. EXPLORE.



FIND YOUR FLOOR.



ATL-EVET7-SB